



PCT/GB 2004 / 0 0 3 8 6 3

REC'D 11 NOV 2004
WIPO



PCT INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

BEST AVAILABLE COPY

Signed

Re Behan

Dated 21 October 2004

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

THE PATENT OFFICE

Patents Form 1/77 16 SEP 2003

Patents Act 1977
(Rule 10)

EFFECTIVE DATE

The
Patent

THE PATENT OFFICE

Rm

16 SEP 2003

RECEIVED BY FAX

16SEP03 E837510-1 002824
P01/7700 0.00-0321617.3

The Patent Office

Cardiff Road
Newport
SOUTH WALES NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form).

1. Your Reference

P.7143 GBA

2. Patent application number (The Patent Office will fill in this part)

0321617.3

16 SEP 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NEW TRANSDUCERS LIMITED
37 Isworth Place
LONDON SW3 3QH
G.B.

Patents ADP number (if you know it)

7283476003

If the applicant is a corporate body, give the country/state of its incorporation

G.B.

4. Title of the invention

AUDIO APPARATUS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

MAGUIRE BOSS
5 Crown Street
St. Ives
Cambridgeshire PE27 5EB
G.B.

Patents ADP number (if you know it)

07188725001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body:)
- See note (d)

Patents Form 1/77

0080079:16-Sep-03:12-23

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 18

Claims(s)

Abstract

Drawing(s)

6 only PM -

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date: 09.09.2003

MAGUIRE BOSS

12. Name and daytime telephone number of person to contact in the United Kingdom

PETER MAGUIRE

Tel: 01480 301588

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

0088079/16 Sep 03 12-23

5

TITLE: AUDIO APPARATUS

10

DESCRIPTION

15

TECHNICAL FIELD

The invention relates to audio apparatus and more particularly to audio apparatus for personal use.

BACKGROUND ART

It is known to provide earphones which may be inserted into a user's ear cavity or headphones comprising a small loudspeaker mounted on a headband and arranged to be placed against or over the user's ear. Such sound sources transmit sound to a user's inner ear via the ear drum using air pressure waves passing along the ear canal.

25

A typical conventional earphone uses a moving coil type transducer mounted in a plastic housing. The moving

coil is connected to a light diaphragm which is designed to fit into the entrance of the ear canal. The moving coil and diaphragm are light and are coupled intimately to the eardrum at the other end of the ear canal. The acoustic impedance of the eardrum and ear canal seen by the moving coil transducer is relatively small. This small impedance in conjunction with the intimate coupling means that the motion requirements of the moving coil transducer are relatively low.

10 A moving coil transducer requires a magnetic circuit, which typically contain metal parts, e.g. steel or iron pole pieces, to generate magnetic field lines for the coil to move. These parts provide a relatively large inertial mass which combined with the low motion requirement means
15 that relatively little vibration enters the housing.

There are disadvantages associated with both headphones and earphones. For example, they may obstruct normal auditory process such as conversation or may prevent a user from hearing useful or important external audio
20 information, e.g. a warning. Furthermore, they are generally uncomfortable and if the volume of the sound being transmitted is too high they may cause auditory overload and damage.

An alternative method of supplying sound to a user's
25 inner ear is to use bone conduction as for example in some types of hearing aids. In this case, a transducer is fixed

to a user's mastoid bone to be mechanically coupled to the user's skull. Sound is then transmitted from the transducer through the skull and directly to the cochlea or inner ear. The eardrum is not involved in this sound transmission route. Locating the transducer behind the ear provides good mechanical coupling.

One disadvantage is that the mechanical impedance of the skull at the location of the transducer is a complex function of frequency. Thus, the design of the transducer and the necessary electrical equalisation may be expensive and difficult.

Alternative solutions are proposed in JP56-089200 (Matsushita Electric Ind Co Ltd), WO 01/87007 (Temco Japan Co, Ltd) and WO 02/30151 to the present applicant. In each publication, a transducer is coupled direct to a user's pinna, in particular behind a user's earlobe, to excite vibration therein whereby an acoustic signal is transmitted to the user's inner ear.

As set out in WO 02/30151, the transducer may be piezoelectric. Like the moving coil type transducer in a conventional earphone, the piezoelectric transducer requires protection from mechanical damage. Furthermore, the piezoelectric transducer must be mechanically coupled to the pinna and this coupling must be protected. Accordingly, the transducer may be mounted in a protective housing.

The piezoelectric transducer is not in intimate coupling with the eardrum and drives through the relatively high impedance of the pinna. Furthermore, sound is transmitted to the eardrum through a mechanical coupling rather than an audio coupling. Accordingly, a relatively high level of vibration energy is required to maintain the same level at the eardrum as a conventional earphone.

Unlike in a moving coil type transducer, a piezoelectric transducer does not have a high inertial mass to which the vibrations may be referenced. Accordingly, the housing may vibrate to produce unwanted external sound radiation. Such leakage of sound radiation may annoy nearby listeners and may reduce the privacy for the wearer and is detrimental to the performance of the audio apparatus. Accordingly, an object of the invention is to provide an improved design of housing.

DISCLOSURE OF INVENTION

According to a first aspect of the invention, there is provided audio apparatus comprising a piezoelectric transducer and coupling means for coupling the transducer to a user's pinna whereby the transducer excites vibration in the pinna to cause it to transmit an acoustic signal from the transducer to a user's inner ear, characterised in that the transducer is embedded in a casing of relatively soft material and the casing is mounted to a housing of

relatively hard material such that a cavity is defined between the casing and housing.

The pinna is the whole of a user's outer ear. The transducer may be coupled to a rear face of a user's pinna adjacent to a user's concha.

The casing and housing together form a two-part structure which protects the transducer. The use of a two-part structure provides greater flexibility of design to create apparatus which produces minimal unwanted radiation, and has a transducer which is sufficiently protected with good sensitivity. In contrast, mounting a piezoelectric transducer in a one-part housing is less flexible. If a relatively hard material is used this may adversely affect the sensitivity and bandwidth of the apparatus and may lead to unwanted radiation. However, if a relatively soft material is used, the apparatus may not be sufficiently robust.

The casing may be moulded. The relatively soft material may for example be rubber, silicone or polyurethane. The material may also be non-conducting, non-allergenic and/or waterproof. The material preferably has minimal effect on the performance of the transducer, i.e. does not constrain movement of the transducer and may provide some protection, e.g. from small shocks and the environment, particularly moisture.

The housing is preferably rigid material so as to provide extra protection for the transducer, particularly during handling. The relatively hard material may for example be a metal (e.g. aluminium or steel), hard plastics (e.g. perspex, Acrylonitrile Butadiene Styrene (ABS)) or a high shore hardness rubber.

Both the casing and the housing may be moulded, e.g. in a two step moulding operation. Alternatively, the housing may be cast or stamped. The casing may be a snap-fit in the housing for ease of manufacture.

The coupling between the casing and the housing is preferably minimal to reduce transmission of vibration from the transducer to the housing. The housing may be coupled to the casing at locations on the casing having reduced vibration. The locations may contact regions of the transducer at which vibration is suppressed, e.g. by mounting masses. The locations may be at the opposed ends of the casing.

The cavity may ensure minimal coupling between the casing and the housing. The cavity may also be designed to reduce rear radiation from the transducer which may reduce unwanted radiation from the apparatus. The cavity may have a mechanical impedance (Z_{cavity}) which is lower than the output impedance of the transducer and more preferably, lower than the impedance of the pinna (Z_{pinna}). Thus the mechanical impedance of the cavity is preferably designed

such that it does not limit available force. Therefore the motion of the transducer and available force is not significantly effected by the cavity. Therefore the cavity does not have a detrimental effect on the sensitivity of the device. Where the cavity impedance is less than the pinna impedance, all the available force may be transmitted to the pinna and the cavity has a minimal effect on the operation of the device. The effect of the cavity is then limited to the desired function of mechanical protection and reduction of unwanted external acoustic radiation.

The mechanical properties, in particular mechanical impedance, of the transducer may be selected to match those of a typical pinna. By matching the mechanical properties, in particular the mechanical impedance, improved efficiency and bandwidth may be achieved. Alternatively, the mechanical properties may be selected for suitability to the application. For example, if the matched transducer is too thin to be durable, the mechanical impedance of the transducer may be increased to provide greater durability. Such a transducer may have reduced efficiency but may still be useable.

The mechanical properties of the transducer may be matched to optimise the contact force between the transducer and the pinna, for example by considering one or more parameters selected from smoothness, bandwidth and/or level of the frequency response determined by each

subjective user as well as the physical comfort of the user both statically and in the presence of an audio signal. The mechanical properties of the transducer may be selected to optimise the frequency range of the transducer.

5 The mechanical properties may include the location of the mounting, added masses, the number of piezoelectric layers. The transducer may have an off centre mounting whereby a torsional force is used to provide good contact to the pinna. Masses may be added, for example at the ends
10 of the piezoelectric element, to improve the low frequency bandwidth. The transducer may have multiple layers of piezoelectric material whereby the voltage sensitivity may be increased and the voltage requirement of an amplifier may be reduced. The or each layer of piezoelectric material
15 may be compressed.

The coupling means preferably provide a contact pressure between the pinna and the apparatus so that the apparatus is coupled to the full mechanical impedance of the pinna. If the contact pressure is too light, the
20 impedance presented to the apparatus is too small and the energy transfer may be significantly reduced. The coupling means may be in the form of a hook, an upper end of which curves over an upper surface of the pinna. The lower end may curve under the lower surface of the pinna or may hang
25 straight down behind the pinna. A hook having both ends curving over the pinna may provide a more secure fitting

and should maintain sufficient contact pressure for efficient energy transfer.

The housing is mounted to the hook so that the transducer casing contacts a lower part of the pinna, for example the ear lobe. The hook may be made of metal, plastics or rubberised material.

The audio apparatus may comprise a built-in facility to locate the optimum location of the transducer on the pinna for each individual user as taught in WO 02/30151. The audio apparatus may comprise an equaliser for applying an equalisation to improve the acoustic performance of the audio apparatus.

The audio apparatus may be unhandled, i.e. for use on both ears. The manufacture may thus be simpler and cheaper since the tooling costs are reduced. Furthermore, the apparatus may be more user-friendly since a user cannot place the apparatus on the wrong ear and replacements may be easier to obtain. A user may use two audio apparatuses, one mounted on each ear. The signal input may be different to each audio apparatus, e.g. to create a correlated stereo image or may be the same for both audio apparatuses.

The audio apparatus may comprise a miniature built in microphone e.g. for a hands free telephony and/or may comprise a built in micro receiver, for example, for a wireless link to a local source e.g. a CD player or a

telephone, or to a remote source for broadcast transmissions.

According to a second aspect of the invention, there is provided a method⁵ of designing audio apparatus comprising mechanically coupling a piezoelectric transducer to a user's pinna and driving the transducer so that the transducer excites vibration in the pinna to cause it to transmit an acoustic signal from the transducer to a user's inner ear, characterised by embedding the transducer in a casing of relatively soft material and by mounting the casing to protective housing of relatively hard material such that a cavity is defined between the casing and housing.

The method may comprise selecting parameters of one or more of the cavity, casing and housing to reduce unwanted radiation, provide protection for the transducer and/or to ensure good sensitivity and bandwidth. In particular, the coupling between the casing and housing and/or the cavity may be selected to reduce unwanted radiation. The material of the casing may be selected to ensure good sensitivity and bandwidth and/or provide some protection for the transducer. The material of the housing may be selected to provide additional protection. The mechanical impedance of the cavity may be lower than the output impedance of the transducer and more preferably, lower than the impedance of the pinna.

The method may comprise measuring the acoustic performance of the audio apparatus for each user and adjusting the location of the transducer on the pinna for each individual user to optimise acoustic performance, for example to provide optimal tonal balance. The optimal position may be measured by determining the angle between a horizontal axis extending through the entrance to the ear canal and a radial line which extends through the entrance and which corresponds to the central axis of the transducer. The angle may be in the range of 9 to 41 degrees of declination.

The method may comprise applying an equalisation to improve the acoustic performance of the audio apparatus. The method may comprise applying compression to the signal applied the transducer, particularly if the transducer is a piezoelectric transducer. The method may comprise optimising the contact force between the transducer and the pinna. The contact force may be optimised by considering parameters such as smoothness, bandwidth and/or level of the frequency response determined by each subjective user as well as the physical comfort of the user both statically and in the presence of an audio signal.

The audio apparatuses and methods described above may be used in many applications, for example hands free mobile phones, virtual conferencing, entertainment systems such as in-flight and computer games, communication systems for

emergency and security services, underwater operations, active noise cancelling earphones, tinnitus maskers, call centre and secretarial applications, home theatre and cinema, enhanced and shared reality including data and information interfaces, training applications, museums, 5 stately homes (guided tours) and theme parks and in-car entertainment. Furthermore, the audio apparatus may be used in all applications where natural and unimpeded hearing must be retained, e.g. enhanced safety for 10 pedestrians and cyclists who are also listening to programme material via personal headphones.

A partially deaf person may have good or adequate hearing over part of the frequency range and poor hearing over the rest of the frequency range. The audio apparatus 15 may be used to augment the part of the frequency range for which a partially deaf person has poor hearing without impeding the deaf person's hearing over the rest of the frequency range. For example, the audio apparatus may be used to augment the upper frequency range for a partially 20 deaf person who has good or adequate hearing in the lower part of the frequency spectrum or vice versa. The low frequency range may be below 500Hz and the high frequency range above 1kHz.

BRIEF DESCRIPTION OF THE DRAWINGS

25 For a better understanding of the invention, and purely by way of example, specific embodiments of the invention

will now be described, with reference to the accompanying drawings in which

Figure 1 is a perspective view of an embodiment of the present invention mounted on a pinna;

5 Figure 2 is a cutaway side view of the audio apparatus of Figure 1 with parts removed for clarity;

Figure 3 is a cross-sectional view of the apparatus of Figure 1, taken at right angles to that of Figure 2;

Figure 4a is a perspective view of an alternative
10 embodiment of audio apparatus;

Figure 4b is a view showing the components of the audio apparatus of Figure 4a,

Figures 5a to 5c are side views of alternative piezoelectric transducers which may be used in the present
15 invention;

Figure 6 is a graph of power against frequency for the transducer of Figure 5b when attached to the pinna;

Figure 7 is a schematic diagram of the mechanical impedances of the component of an audio apparatus according
20 to an aspect of the invention;

Figures 8a and 8b are graphs of the mechanical impedances of the components with frequency.

DETAILED DESCRIPTION

25 Figure 1 shows an audio apparatus 30 according to the present invention mounted on a pinna 32. The apparatus

comprises a protective outer housing 34 to which coupling means having upper and lower hooks 36,38 are attached. The hooks 36,38 loop over the upper and lower parts of the pinna 32 respectively to ensure a good contact between the apparatus and the pinna. Leads 40 extend from the housing 34 to be connected to an external sound source.

As shown in Figures 2, the outer housing 34 is a hollow body which houses a casing 42 in which a piezoelectric transducer 44 is embedded. A cavity 48 is defined between the outer housing 34 and the casing 42. The casing 42 is of generally rectangular cross-section with a concave section 46 and is shaped so as to provide a snug fit on the user's pinna. The casing 42 is formed from a material which is much softer than the material used for the housing 34.

The outer housing 34 is connected to opposed ends of the casing 42 by connectors 50 which minimise transmission of vibration from the casing 42 to the housing 34. The housing 34 is formed with loops 52 which secure the coupling means 54 thereto.

As shown in Figure 3, the transducer 44 is embedded in a casing 60 which is formed with lugs 56 along both sides. The lugs 56 engage in corresponding grooves 58 on the inner face of the outer housing 62 so that the casing is a snap-fit on the housing. The coupling means 54 is secured to the outer face of the outer housing 62. A cavity 64 is

defined between the inner face of the outer housing 62 and the outer face of the casing 60.

Figures 4a and 4b show audio apparatus comprising a steel hook 20 for supporting the earphone on a user's pinna and a piezoelectric transducer 22 comprising a bimorph beam embedded in a hermetically sealed casing 24. The transducer 22 is protected from damage by a protective housing 26 in the form of a bar which may be chromed for aesthetic affect. The beam is terminated with two brass masses whereby the low frequency performance may be extended.

The user is able to fit the apparatus to their pinna by initially hooking the hook over the upper portion of their ear. The user may then press on both the top of the hook and the opposite end of the protective bar to bend the shape of the device for their comfort and to achieve a good fit for acoustic purposes.

Figures 5a to 5c show alternative piezoelectric transducers which may be used in the present invention. In Figure 5a, the transducer 10 is curved and comprises two curved piezoelectric layers 12 sandwiching a curved shim layer 14. In Figures 5b and 5c, the transducer are not curved and are rectangular of length 28 mm and width 6 mm.

In Figure 5b, the transducer 40 comprises two layers 42 of piezoelectric material each of thickness 100micron. Each layer 42 is separated by a shim layer 44 of brass

which is 80micron thick. Masses 46 are mounted to each end of the transducer. The transducer has an output impedance of 3.3 Ns/m. In Figure 5c, the transducer comprises four layers 16 of piezoelectric material (e.g. PZT) alternating with three electrode layers 18 (typically silver palladium). The layers are arranged in a stack with the bottom layer being an electrode layer 18 and the top layer being a piezoelectric layer 16. The transducer is mounted on an alloy shim and is secured by an adhesive layer 19.

Figure 6 shows a measurement of the power dissipated in the transducer of Figure 5b when it is attached to the pinna (dotted line) and when it is not attached to the pinna (solid line). When the transducer is mounted to the pinna the power extracted from the transducer is increased since the load of the pinna significantly increases the real part of the electrical impedance of the transducer. Generally, the electrical impedance of a piezoelectric element is predominately capacitive.

The cavities in each of the embodiments may be designed as set out below with reference to Figures 7 to 8B. Figure 7 shows a schematic diagram of the impedances of the system, namely the impedances of the pinna 32, the transducer 70, the cavity 72 and the outer housing 74. The mechanical impedance of the cavity may be estimated by calculating the compliance of an air-load which itself may be estimated (assuming small displacements) from:

$$C_{\text{cavity}} = \frac{\text{depth}}{\text{Area} \cdot P_0}$$

where P_0 is atmospheric pressure (101kPa).

The mechanical impedance of the cavity may then be expressed over a frequency range using:

$$Z_{\text{cavity}} = \frac{1}{2\pi f C}$$

5

The parameters (e.g. size and composition) of the piezoelectric transducer are selected for efficient energy transfer to the mechanical impedance of the pinna over a given bandwidth. One acceptable design of transducer which
 10 operates from 500Hz to 10kHz comprises five piezoelectric layers and is 28mm x 6mm. Such a transducer has a mechanical output impedance of 4.47 kg/s. A cavity with the same area as the transducer and a depth of 2.5mm has an air-load compliance of $1.47 \times 10^{-4} \text{m/N}$.

15

Figure 8a shows the impedance of the cavity, the pinna and the transducer against frequency. The impedance of the pinna is roughly constant with frequency below 1kHz at a value of $Z_{\text{pinna}} = 2.7 \text{kg/s}$. Accordingly, the impedance of each component may be simplified as shown in Figure 8b. At
 20 a frequency f_1 (approx. 420Hz) the mechanical impedance of the cavity is equal to that of the transducer. Below this frequency the transducer output will be constrained by the action of the cavity and thus f_1 should be set as the

minimum operating frequency for the apparatus. The frequency of f_1 may be lowered by increasing the size (particularly depth) of the cavity to avoid the crossover point occurring in the working band of the apparatus.

5 At the lowest operating frequency, namely 500Hz, $Z_{\text{cavity}} = 2.17 \text{ kg/s}$ and thus $Z_{\text{cavity}} < Z_{\text{piezo}}$ and $Z_{\text{cavity}} < Z_{\text{pinna}}$. This condition is also satisfied throughout the operating frequency, i.e. upto 10kHz, since Z_{piezo} is constant, Z_{pinna} is constant to 1kHz and then rises whereas
10 Z_{cavity} decreases with frequency.

By mounting the transducer behind the ear, the audio apparatus is unobtrusive, discreet, and does not obstruct or distort the shape of the pinna. The transducer is distanced from and thus does not impede the entrance to the
15 ear canal and thus normal hearing is not affected. Furthermore, there is reduced occlusion of the external ear and hence reduced or no localisation errors when compared to conventional headphones which occlude the ear to varying degrees.

20 The audio apparatus may be manufactured from low cost, lightweight materials and may thus be disposable. The disposability may be an advantage where hygiene is paramount, e.g. conference use. Alternatively, since the audio is not inserted into the ear, it may be more
25 comfortable and thus more suitable for long term wear.

1/6

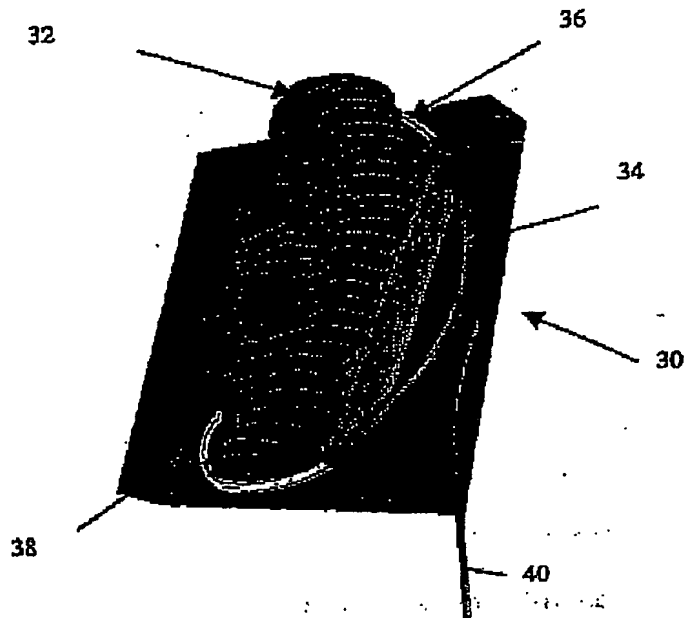


FIG 1

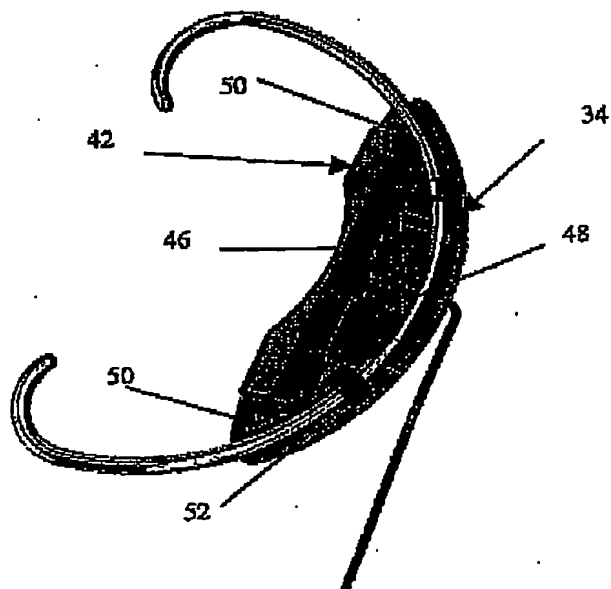


FIG 2

2/6

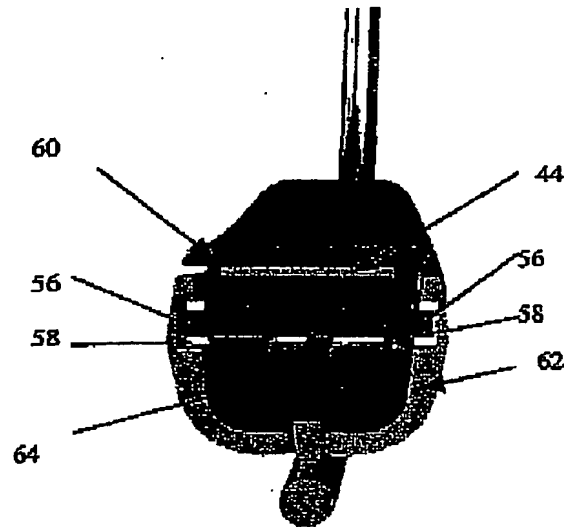


FIG 3

3/6

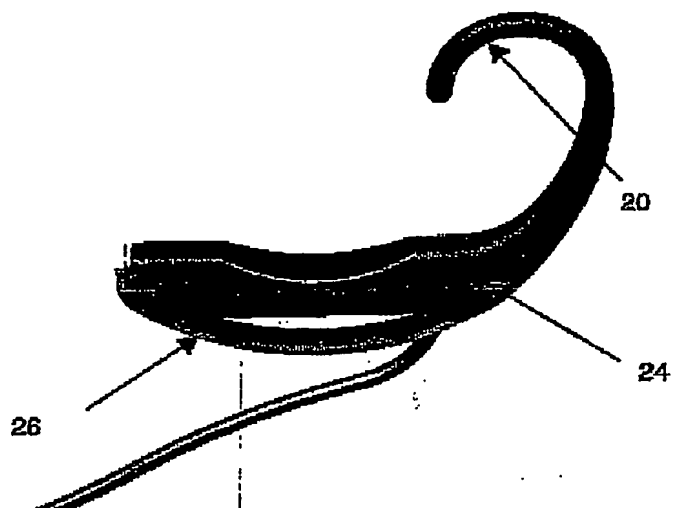


FIG 4a

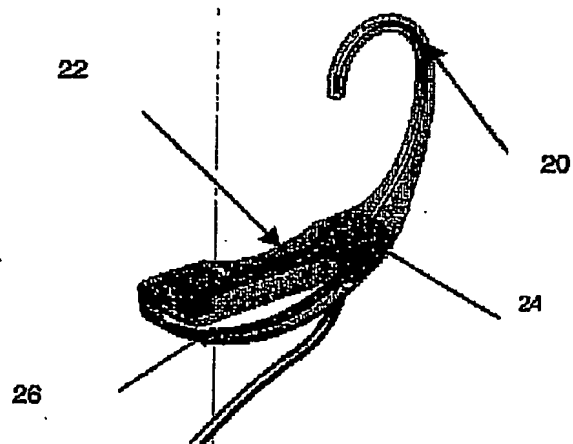


FIG 4b

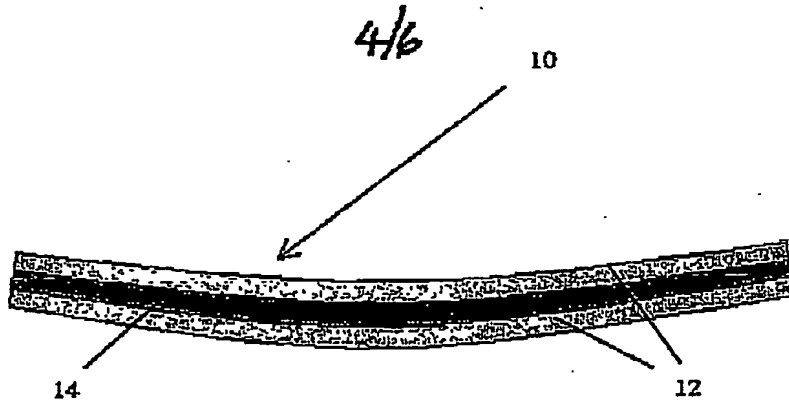


FIG 5A

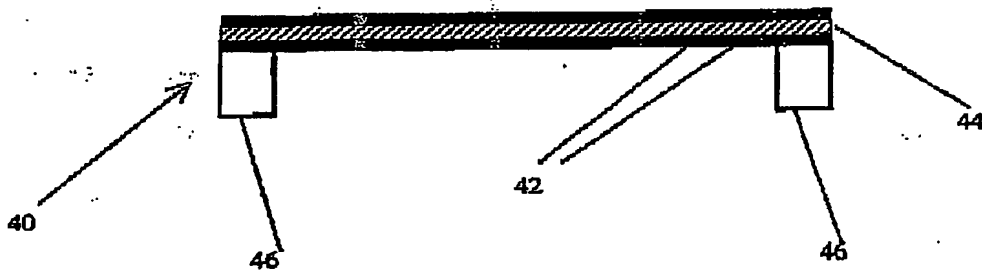


FIG 5B

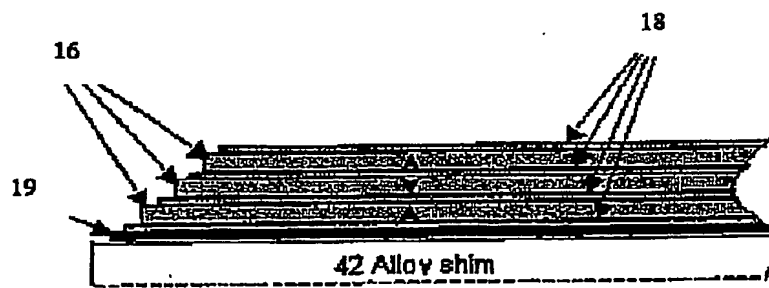


FIG 5C

5/6

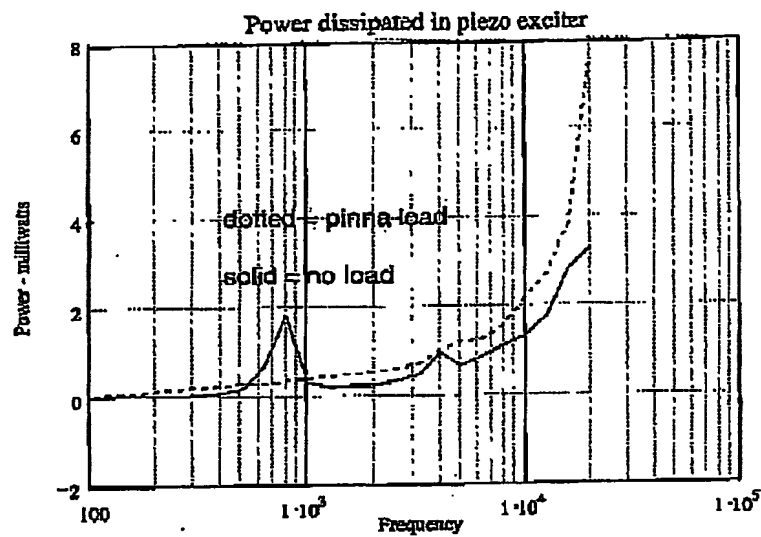


FIG 6

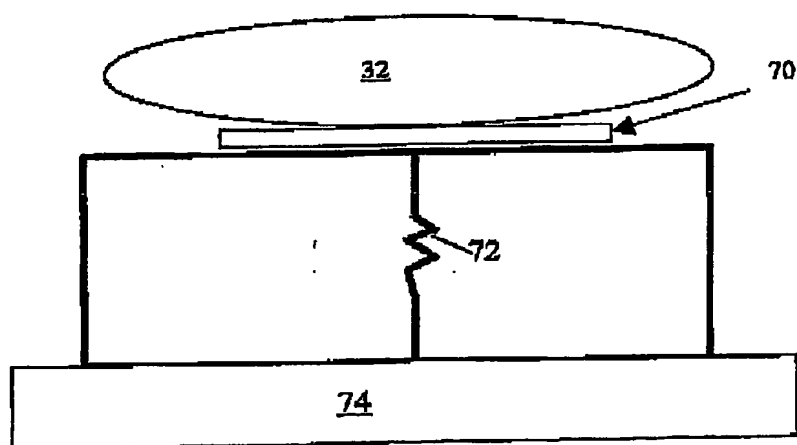


FIG 7

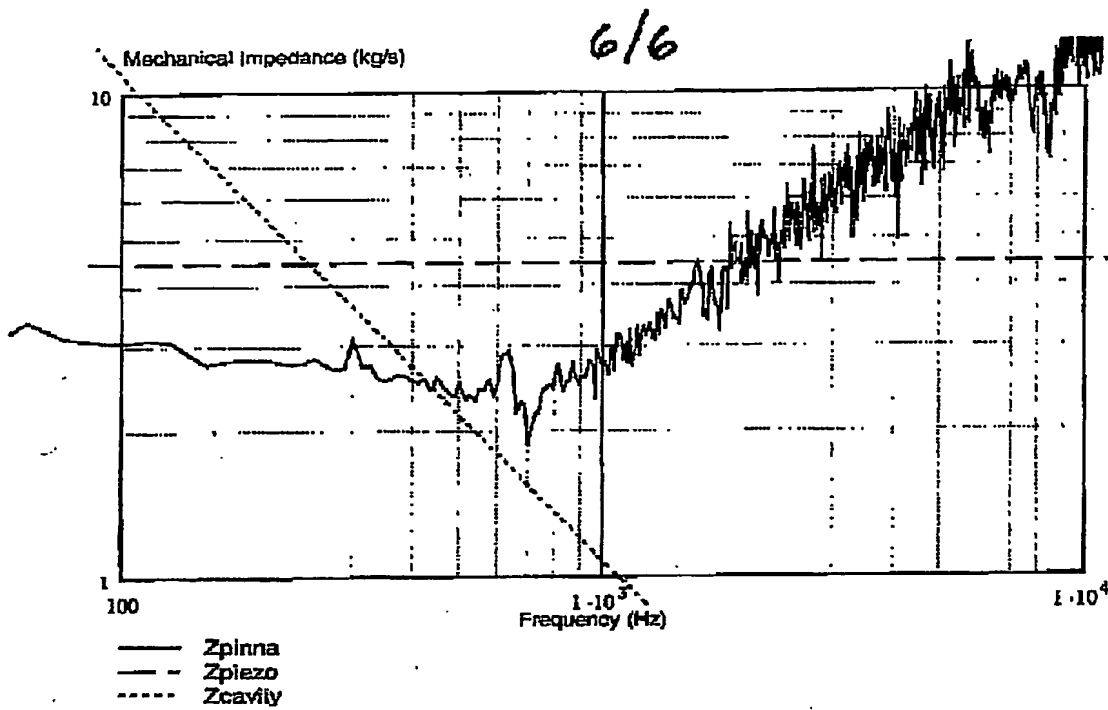


FIG 8a

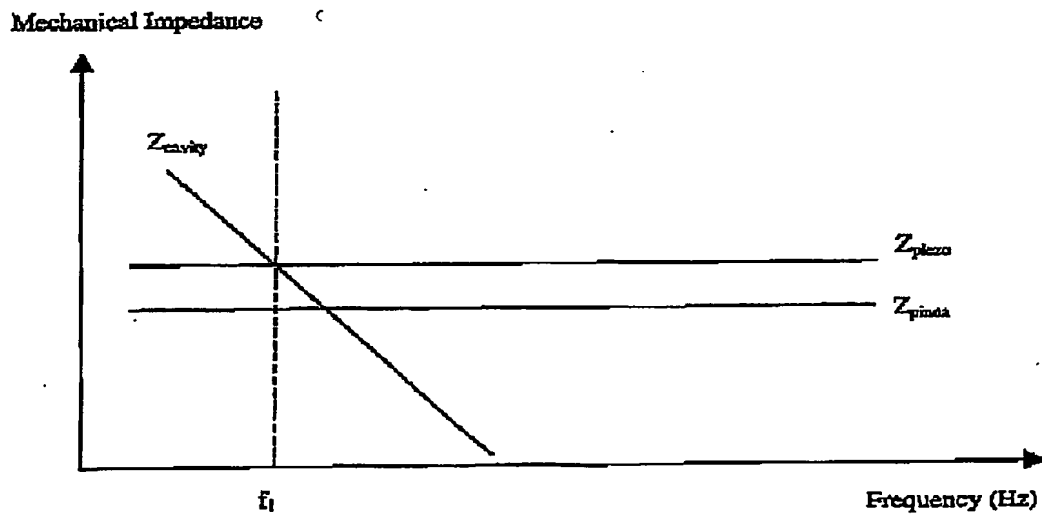


FIG 8b

PCT/GB2004/003863



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.